

Sensor-switched outdoor light

L 1

black

EAN 4007841 650612

Article number 650612



Max. 60 W



infrared sensor
180°



max. 10 m



IP44



Sensor 90° vertical



2 - 2000 lux



8 sec - 35 min



shock proof IK07



ideal 2 m



energy saving

Function description

Practical design. Practical sensor-switched outdoor light L 1, ideal for building entrances and building fronts, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, includes sheet of house numbers.

Technical specifications

Dimensions (L x W x H)	120 x 110 x 255 mm	Twilight setting	2 – 2000 lx
Mains power supply	230 – 240 V / 50 Hz	Time setting	8 s – 35 Min.
Sensor Technology	passive infrared	Basic light level function	No
Output	60 W	Soft light start	No
Power consumption	0,55 W	Impact resistance	IK07
Interconnection	No	IP-rating	IP44
Slave mode/selectable	No	Protection class	II
With lamp	No	Ambient temperature	-20 – 40 °C
Lamp	All-purpose lamp	Housing material	Plastic
Base	E27	Cover material	Plastic, opal
With motion detector	Yes	Manufacturer's Warranty	3 years
Detection angle	180 °	Settings via	Potentiometers
Capability of masking out individual segments	Yes	With remote control	No
Electronic scalability	No	Installation site	wall
Mechanical scalability	No	Cover material	sticker
Reach, radial	r = 3 m (14 m ²)	Version	black
Reach, tangential	r = 10 m (157 m ²)	PU1, EAN	4007841650612
Photo-cell controller	Yes		

Sensor-switched outdoor light

L 1


black

EAN 4007841 650612

Article number 650612



Detection Zone

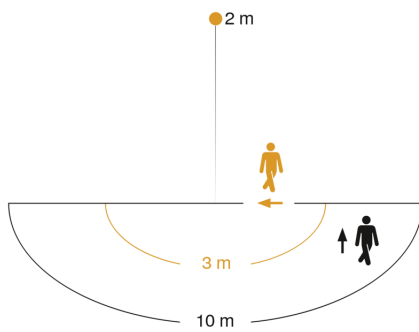

Mögliche Montagehöhe: 1,80 m – 3,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

