

Sensor-switched LED indoor light

RS PRO P2 S

Emergency light - warm white

EAN 4007841 058586

Article number 058586



Light source not
exchangeable



Control gear not
exchangeable

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect switched indoor light. The emergency-light version of the RS PRO P2 S integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and unbeatable efficiency. As many as ten lights can be interconnected by cable. Output: 15,1 W with 1674 lm, 3000 K.

Technical specifications

Dimensions (Ø x H)	320 x 110 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Output	15,1 W
Power consumption	136 W
Interconnection	Yes
Luminous flux total product	1674 lm
Luminous flux, emergency light	38 lm
Total product efficiency	111 lm/W
Colour temperature	3000 K
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °
Electronic scalability	Yes

Mechanical scalability	No
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Functions	Emergency light in compliance with EN 60598-2-22 for 3h
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	-10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Version	Emergency light - warm white
Total harmonic distortion (THD)	16,9
Power factor	0,96
Photobiological safety in accordance with EN 62471	RG1
PU1, EAN	4007841058586


RS PRO P2 S

Emergency light - warm white

EAN 4007841 058586

Article number 058586


Detection Zone

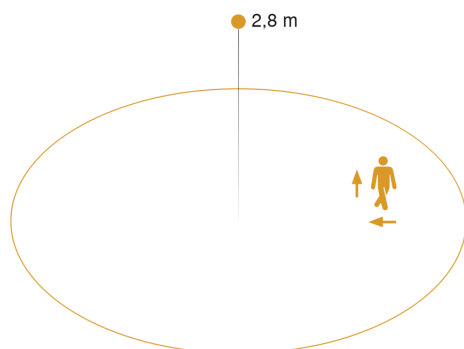


Mögliche Montagehöhe: 2,00 m – 4,00 m

Orange: radial und tangential

Dimension Drawing

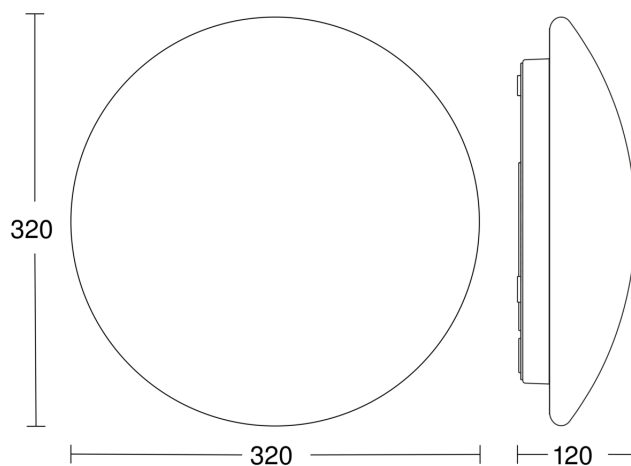


Light Distribution Curve



Output	15,1 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Measured luminous flux (360°)	1674 lm
Colour temperature	3000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Slave/wireless master interconnection circuit diagram



Sensor-switched LED indoor light

RS PRO P2 S

Emergency light - warm white

EAN 4007841 058586

Article number 058586



Master/master interconnection circuit diagram

