


Fire doors hardware

2030 Series

- » Sintered steel latch: endures temperatures over 900° C.
- » 8x8 mm follower rod.
- » Distance between each axis: 85 mm.
- » With panic function (always free passage from the inside), except in the 4030E model). In case of simple follower, a protective device for the follower is installed inside to prevent the handle from being activated. In case of double follower rod, the external side has no panic function (the lock will switch to lever hand position in this case).

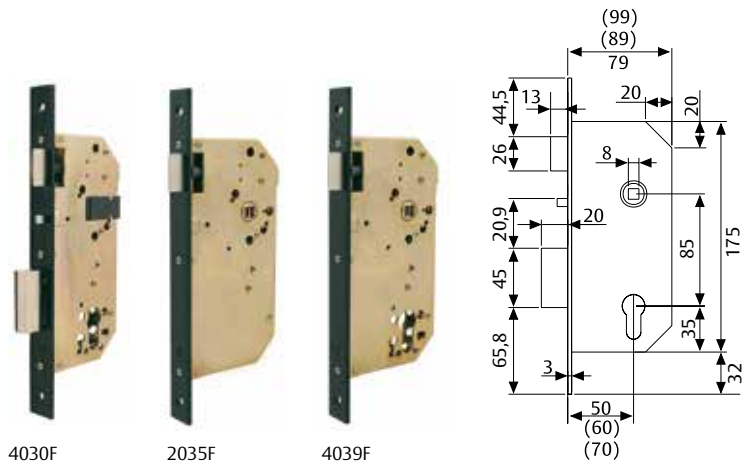

Model	Follower rod	Backset	Security Device	Finish	External operation	Internal operation	Application
2030F60	Simple	50 / 60 / 70	Yes	NE / AI / HL	Pull handle + key	Handle	Entrance doors
2030F6(D-I)	Double	50 / 60 / 70	No	NE / AI / HL	Handle/pull handle + key	Handle + key	Entrance doors
2035F60	Simple	50 / 60	No	NE / AI	Handle	Handle	Passage doors
4039F60	Simple	50 / 60	No	NE / AI	Key	Handle	Entrance hall, garage
4030T6(D-I)	Double	60	No	NE / AI / HL	Handle/pull handle + key	Panic bar	Emergency exit
2035TR6(D-I)*	Double	60	No	NE / AI	Handle + key	Panic bar	Emergency exit
4039TR6(D-I)*	Double	60	No	NE / AI	Handle/pull handle + key	Panic bar	Entrance hall, garage
4030S6(D-I)	Double	50 / 60 / 70	No	NE / AI	Handle/pull handle + key	Handle + key	Entrance doors
4030E6S	Simple		Yes	NE / AI	Handle/pull handle + key	Handle + key	Entrance doors

2030F: panic lock with anti-thrust device

Follower rod	Model	Entrance	Hand	Finish
Standard	2035F	50 / 5R	-	NE
	2035F	50 / 5R	-	AI
	2035F	60 / 6R	-	NE
	2035F	60 / 6R	-	AI
	2035F	60 / 6R	-	HL
Standard	2039F	50 / 5R	-	NE
	2039F	50 / 5R	-	AI
	2039F	60 / 6R	-	AI
Standard	2030F	50 / 5R	-	NE
	2030F	50 / 5R	-	AI
	2030F	5R	-	HL
	2030F	60 / 6R	-	NE
	2030F	60 / 6R	-	AI
	2030F	60	-	HL

2030E: not panic with anti-thrust device

Follower rod	Model	Finish	1/2 rounded forend
Standard	4030E6SNE	Black	-
	4030E6SAI	Stainless steel	-
	4030E6SNR	Black	YES
	4030E6SRI	Stainless steel	YES
	4030E6SHR	Brass plated	YES

2030F: panic without anti - thrust device

Follower rod	Model	Entrance	Hand	Finish
Split follower	2030F	50 / 5R	L / R	NE
	2030F	50	L / R	AI
	2030F	50 / 5R	L / R	HL
	2030F	60 / 5R	L / R	NE
	2030F	60 / 5R	L / R	AI
	2030F	60	L / R	HL