FERMAX

REF.1507 1W MEET VIDEO WIT BLACK KIT

DESCRIPTION

VIDEO WIT MEET KIT for **single-family homes, offices, and businesses**. MEET IP video door entry system. Decentralised **SIP P2P** protocol. Direct connection of devices to the building's network infrastructure. APPs installation.

The kit includes:

14833	WIT 10'' MONITOR POE BLACK MEET
953303	1/W MILO VIDEO PANEL MEET POE BLACK
1586	SWITCH POE 4 PORTS
95411	NEO/WIT MONITOR CONNECTOR MEET
9543	MILO 1/W PANEL FLUSH BOX MEET

FEATURES

WIT monitor with 10'' capacitive touch screen and hands-free audio. Surface installation by means of 95411 connector. Doorbell function. Pictures of missed calls. IP camera display. Installation of certified APPs.

MILO 1L IP54 **panel** with 1.2MPx colour camera. Installation in recessed box 9543.

Call forwarding to up to 8 devices with MEET ME APP as standard. Licences included. Pairing of users' mobile devices via label on the front of the monitor. Call reception even when the APP is closed.

Expandable to a maximum of **8 panels and 8 monitors**. Possibility of intercommunication between monitors (autodiscovery of monitors).

SIP compatible. Can be integrated with third party VoIP terminals and PBXs.

RTSP streaming for image recording of the panel from a third party video recorder.

Device reconfiguration via web browser, without any additional software.

ACCESSORIES

Ref. 1485	MEET MONITOR DESKTOP SUPPORT	Ref. 4813	PSU DIN6 100-240VAC/12VDC-2A
Ref. 1490	EXTERNAL DOORLOCK RELAY MEET	Ref.6750	UNIVERSAL ELEC. STRIKE 990N 10-24V
Ref. 95181	MILO 1W PANEL SURFACE BOX ALUMIN.	Ref.67501	UNIVERSAL LOCK RELEASE 990N-P22 10-24V

DIMENSIONS

Box: 32 x 22.7 x 24.5 cm *(W x H x D)*

183
118   49
105   63
1L PANEL
FLUSH BOX
172,5
NOTE: There must be a gap of at least 22 mm between the panel's borders and the wall or any obstacle.

168mm
270mm   20mm
WIT 10'' monitor
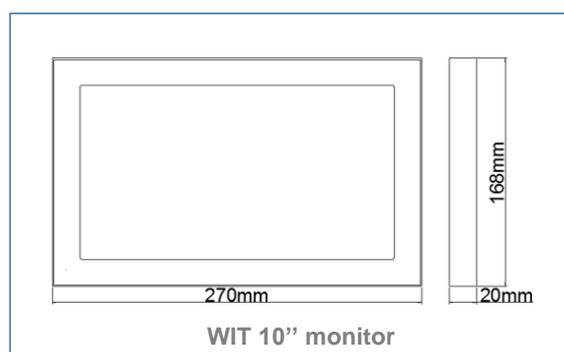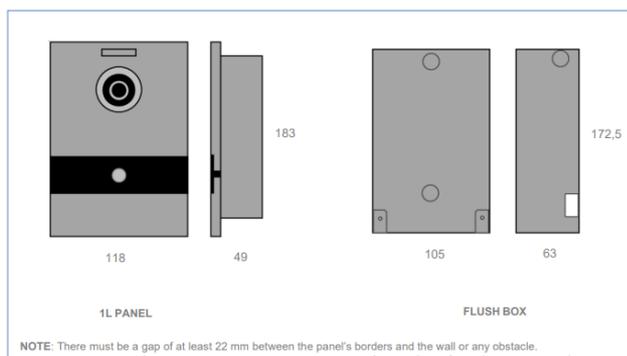
TECHNICAL CHARACTERISTICS

Supply:
- Switch: max.30W/port (IEEE802.3af/at), up to 48W in total
- Devices: PoE
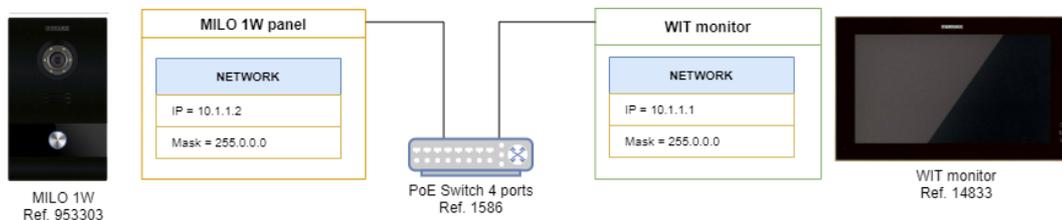- Use an additional power supply for the electric lock release.

Summary:
MILO 1L: Lens 52º(V), 100º(H), 0.5Lux min., white led
WIT monitor: 10", 1024x600px, 8 sensor inputs
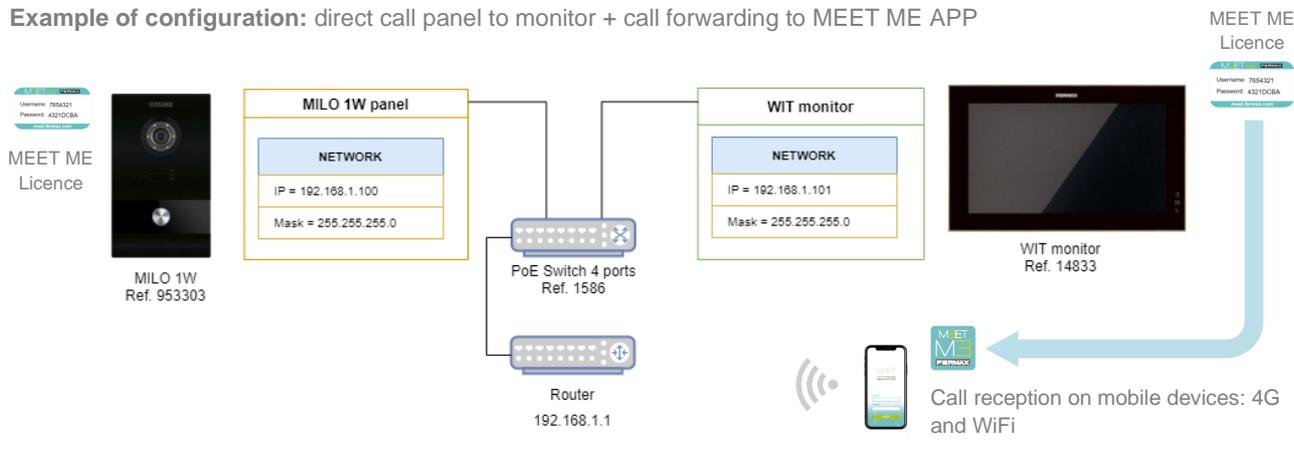Audio/video codecs: G.711, H.264
RJ-45 Ethernet connection

Detailed information on the datasheet of each product

SCHEMES

Default configuration: plug&play, direct panel-to-monitor call without any configuration

MILO 1W
Ref. 953303

MILO 1W panel
NETWORK
IP = 10.1.1.2
Mask = 255.0.0.0

PoE Switch 4 ports
Ref. 1586

WIT monitor
NETWORK
IP = 10.1.1.1
Mask = 255.0.0.0

WIT monitor
Ref. 14833

Example of configuration: direct call panel to monitor + call forwarding to MEET ME APP

MEET ME
Licence

MILO 1W
Ref. 953303

MILO 1W panel
NETWORK
IP = 192.168.1.100
Mask = 255.255.255.0

PoE Switch 4 ports
Ref. 1586

Router
192.168.1.1

WIT monitor
NETWORK
IP = 192.168.1.101
Mask = 255.255.255.0

WIT monitor
Ref. 14833

MEET ME
Licence

Call reception on mobile devices: 4G and WiFi

MANUALS & DATASHEETS

14833   WIT 10'' MONITOR POE WHITE MEET

953303   1/W MILO VIDEO PANEL POE BLACK MEET

1586   SWITCH POE 4 PORTS

95411   NEO/WIT MONITOR CONNECTOR MEET

9543   MILO 1/W PANEL FLUSH BOX MEET