



# DC700

## Technical Datasheet

**ASSA ABLOY**  
Opening Solutions

Door closer with Cam-Motion® technology  
for comfortable opening of high traffic doors

Experience a safer  
and more open world

## DC700

Door closer with Cam-Motion® technology  
and guide rail – for single leaf doors, size 3-6



DC700 with guide rail G195, silver, EV1

**Cam-Motion® technology** creates rapidly decreasing opening force without losing fire or smoke protection compliance

The DC700 series brings precise control for doors which must balance access and protection, contained within a stylish exterior to meet the demands of discerning environments. The rapidly decreasing opening force of Cam-Motion technology ensures doors open with less effort.

- Certified in compliance with EN 1154, size 3-6
- Suitable for fire and smoke protection doors
- For single leaf doors up to 1400 mm width
- Barrier-free according to DIN 18040 (max. leaf width 1250 mm) and CEN/TR 15894

### Colours

- Silver, EV1
- White, similar to RAL 9016
- Brown, similar to RAL 8014
- Black, similar to RAL 9005
- Stainless steel, design & full cover
- Customized colours on request

### Features

- Symmetric cam design allows 4 mounting options
- Height-adjustable, grooved spindle (14 mm) compensates installation mistakes
- Closing and latch speeds can be raised and lowered independently
- Durable, front-facing metal valves make adjustments easy and reliable
- Consistent performance in a wide range of temperatures
- Backcheck functionality as standard protects frame and surrounding areas
- Optional delayed closing allows more time for a user to pass through the door
- Simplified stock management with universal parts and adaptable solutions

### Product variants

- **DC700DA** with delayed closing variable from 120° to 70°, adjustable from front
- **DC700AC** with opening angle of 180° for standard installation on hinge side

### Guide rails and accessories

- **G195** height-adjustable guide rail (2 mm) with concealed fastening screws
- **G193** standard guide rail with visible fastening screws
- **A152** mechanical hold-open device with adjustable hold-open force, keeps doors open at an angle between 80° and 130° (not approved for use on fire and smoke protection doors)
- **A153** mechanical opening damper, continuously adjustable up to an opening angle of max. 130° (does not replace door stop)
- **A120** mounting plate for door closer
- **A124** replacement plate for renovation applications
- **A130** mounting plate for guide rail
- **A136** mounting plate for guide rail, non-hinge side
- **A104** angle bracket for guide rail
- **A166** glass door shoe for mounting the door closer on a solid glass door
- **A190** screening plate for doors with narrow profiles and glass filling as cover of the back of the door
- **A176** universal drilling gauge

### Four mounting options with one product



Leaf mounting on hinge side



Frame mounting on hinge side




Leaf mounting on non-hinge side



Frame mounting on non-hinge side

# DC700

## Technical attributes and certification

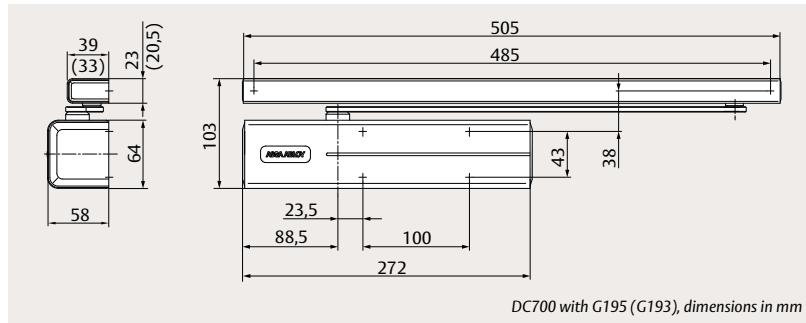

### Technical attributes

Closing force	EN size 3-6
Maximum leaf width	1400 mm
Closing speed (C)	Variable between 170° and 10°
Latch speed (L)	Variable between 10° and 0°
Backcheck (B)	Variable above 75°
Delayed closing (D)	Variable between 120° and 70° (only for DC700DA)
Maximum opening angle	~170°/125° (hinge side / non-hinge side) ~180° for DC700AC
Door system	Single leaf
Handing	Left- / right-handed
Mounting options	Leaf or frame mounting Hinge or non-hinge side
Force adjustment	Yes
Height adjustment	Yes
Corrosion resistance	Grade 4 (240 hours)
Dimensions (H x D x L)	64 x 58 x 272 mm



Visit [assaabloy.com](https://assaabloy.com) to download all relevant product literature




### Certification and testing


Certified in compliance with	EN 1154
CE classification	3   8   3-6   1   1   4 4   8   3-6   1   1   4 (DC700AC)
CE / UKCA mark	Yes
Suitable for fire and smoke protection doors	Yes
Barrier-free according to	CEN/TR 15894 DIN 18040 (max. leaf width 1250 mm)
Third-party verified EPD	ISO 14025, EN 15804




### Independent adjustment via front-facing valves

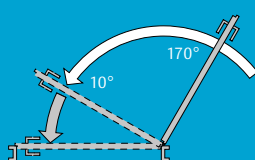


Closing speed (C)

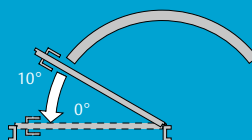

Latch speed (L)

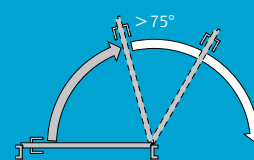

Backcheck (B)



Delayed closing (D)\*


\* only for DC700DA

# DC700

## Space requirement and mounting dimensions




Scan the QR code  
to watch the  
installation video

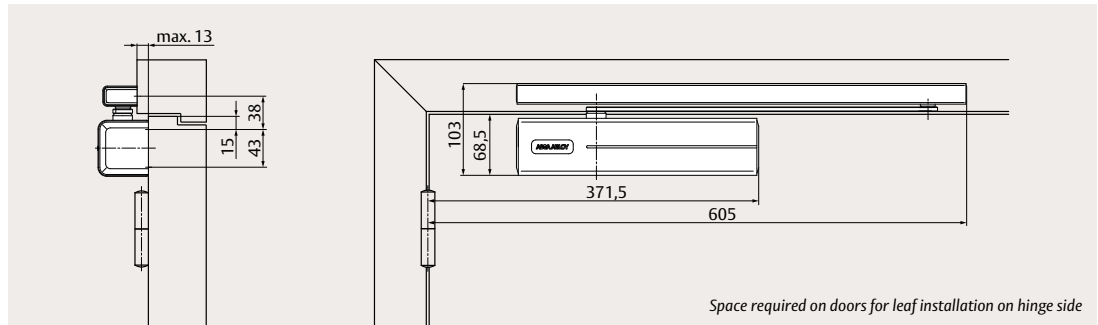

### Direct leaf mounting

on hinge side


The drawing illustrates  
installation on left-handed  
doors. For right-handed doors,  
it is the reverse.

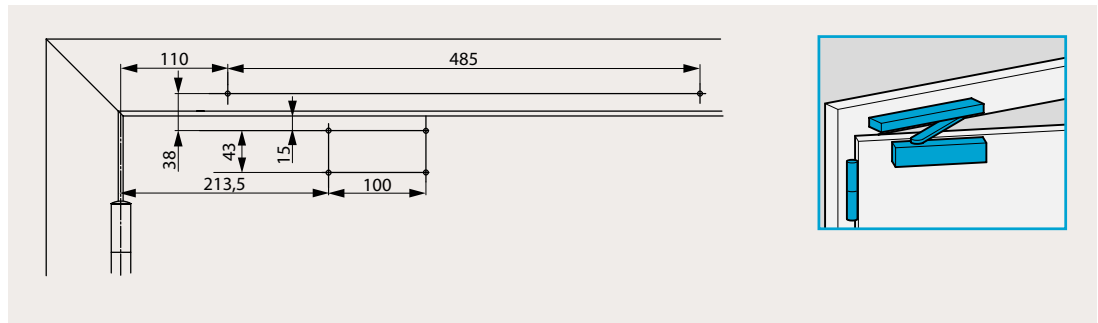

### Mounting plate leaf mounting

on hinge side;  
in compliance with DIN  
EN 1154, supplement 1


The drawing illustrates  
installation on left-handed  
doors. For right-handed doors,  
it is the reverse.

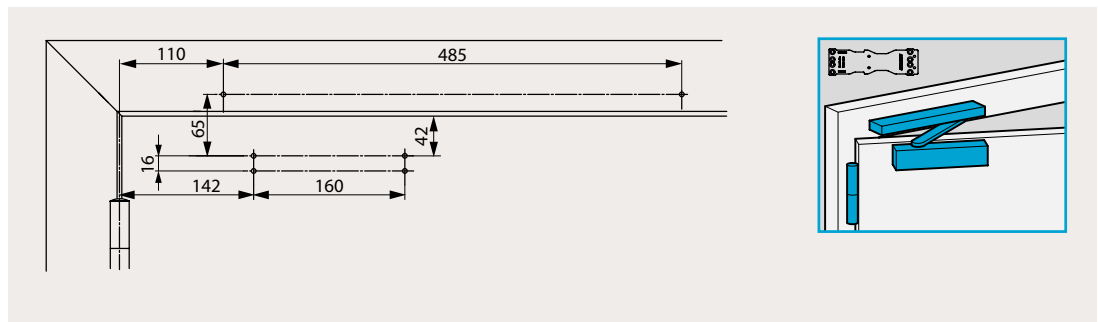

### Direct leaf mounting

on non-hinge side


The drawing illustrates  
installation on right-handed  
doors. For left-handed doors,  
it is the reverse.

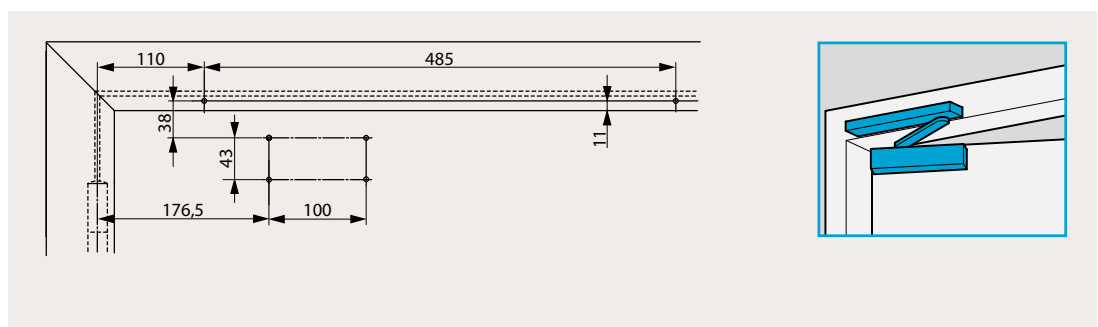

### Mounting plate leaf mounting


on non-hinge side

The drawing illustrates  
installation on right-handed  
doors. For left-handed doors,  
it is the reverse.

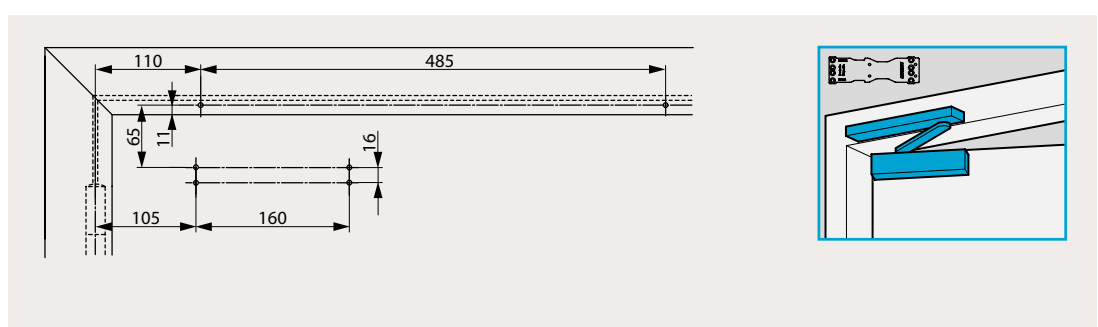


# DC700

## Space requirement and mounting dimensions

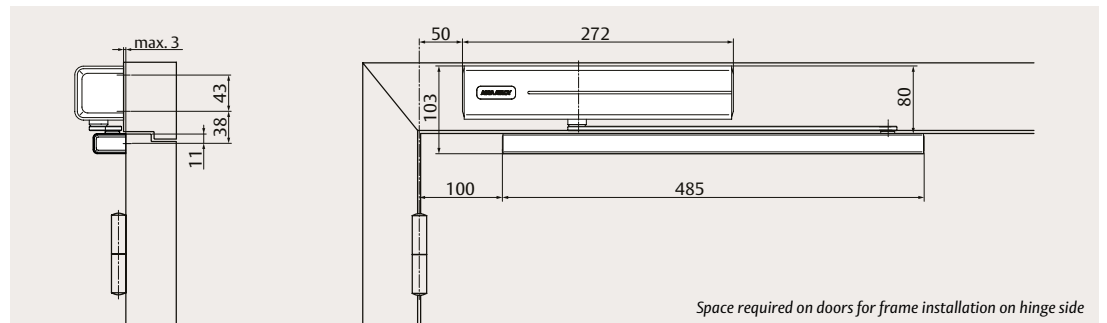


### Direct frame mounting on hinge side

The drawing illustrates installation on left-handed doors. For right-handed doors, it is the reverse.

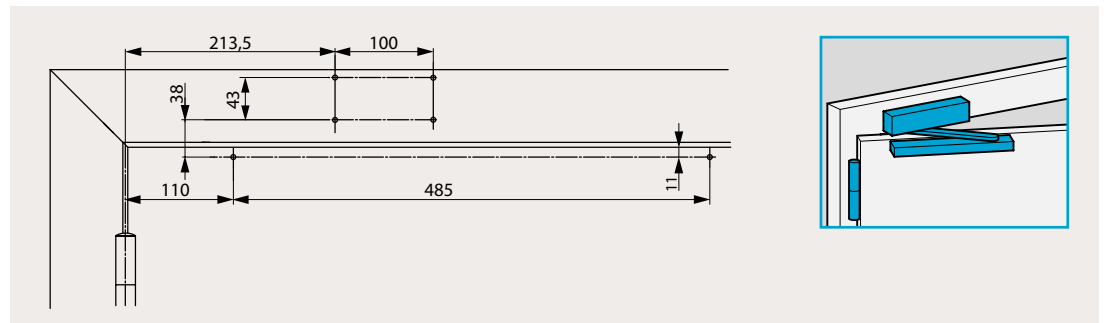


### Mounting plate frame mounting on hinge side

The drawing illustrates installation on left-handed doors. For right-handed doors, it is the reverse.

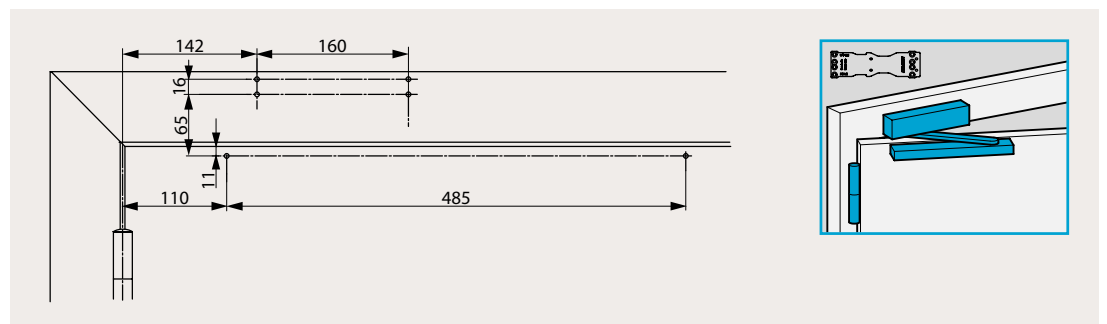


### Direct frame mounting on non-hinge side

The drawing illustrates installation on right-handed doors. For left-handed doors, it is the reverse.

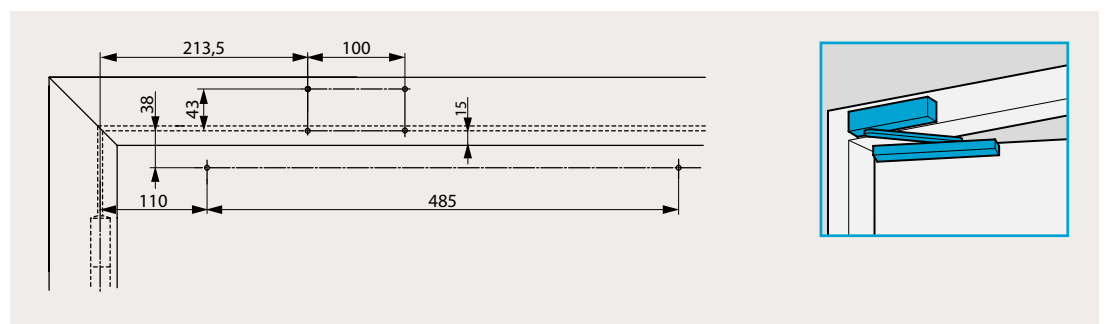

### Mounting plate frame mounting on non-hinge side

The drawing illustrates installation on right-handed doors. For left-handed doors, it is the reverse.

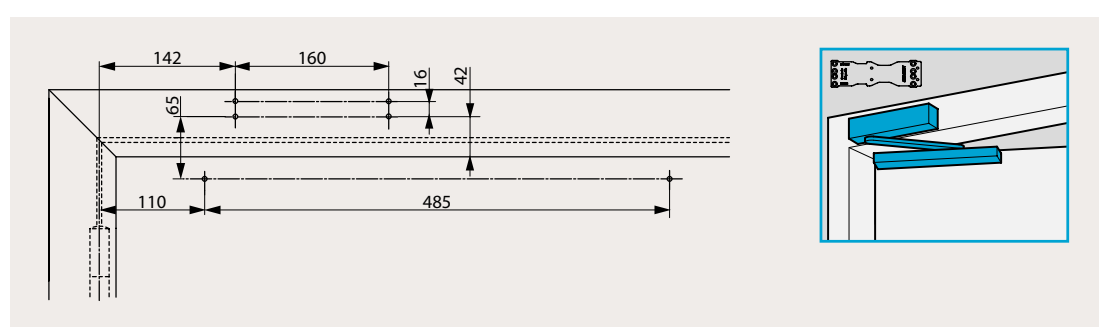


# DC700


## Accessories

The full list of accessories is available under order information.


**A120 mounting plate**  
for door closer;  
in compliance with DIN  
EN 1154, supplement 1

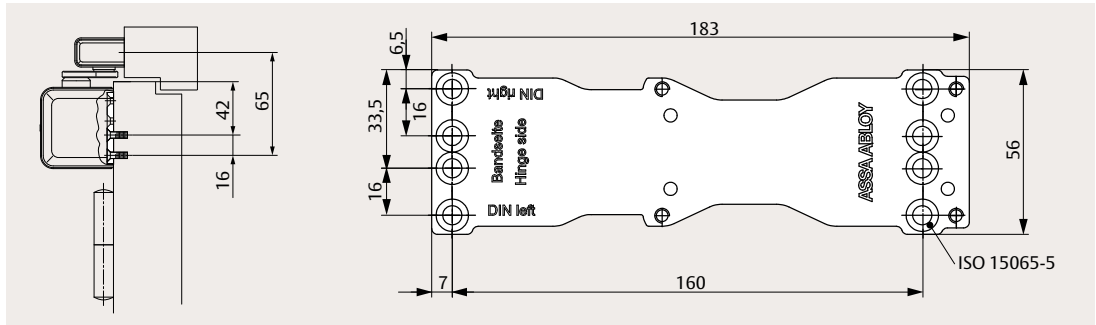


**A124 replacement plate**  
for renovation  
applications

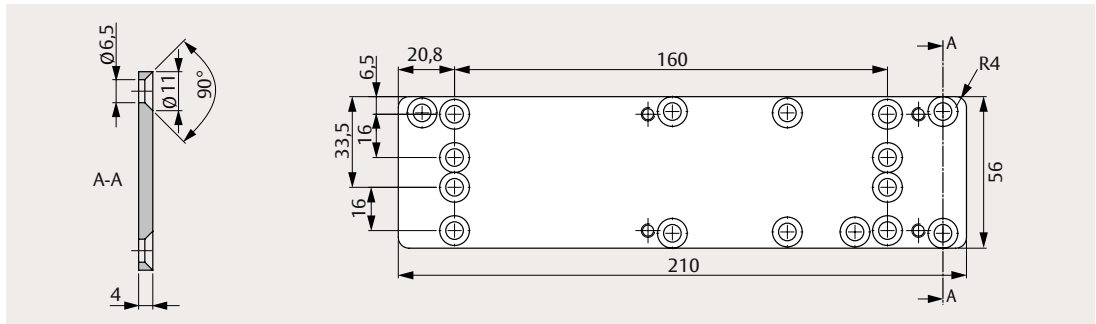


**A130 mounting plate**  
for guide rail

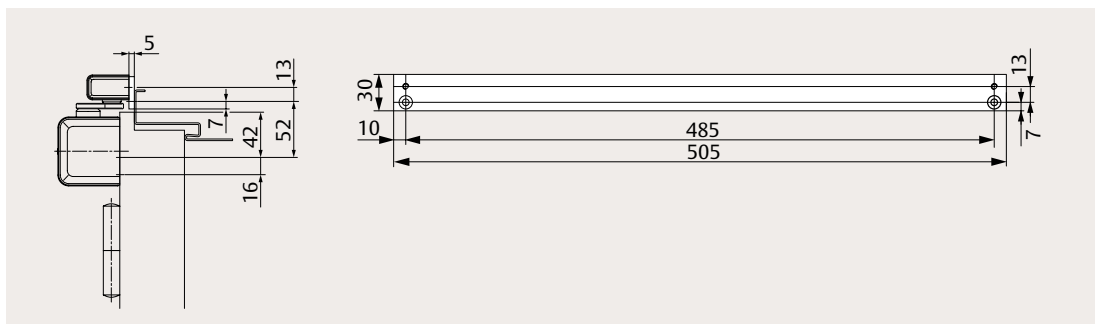

**A136 mounting plate,  
40 mm**  
for guide rail;  
non-hinge side use

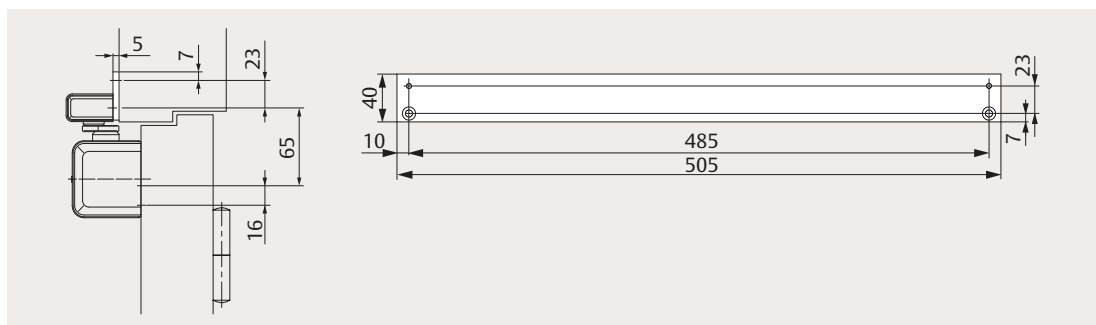

**A104 angle bracket**  
for guide rail

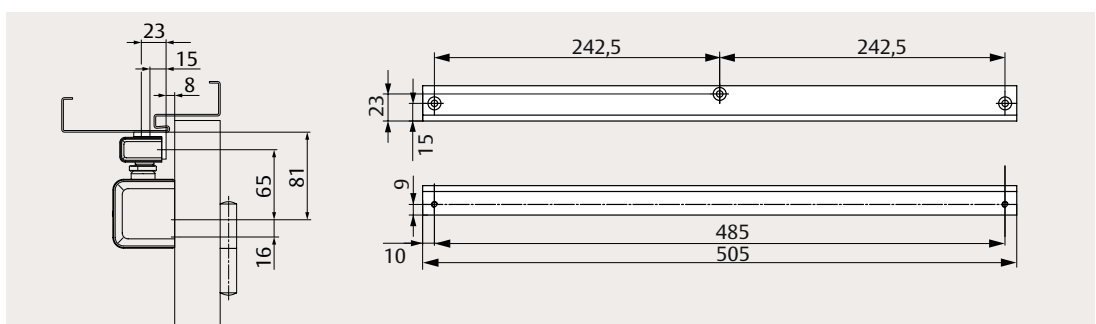

# DC700

## Order information



### Door closers

DC700, EN size 3-6, silver, EV1	DC700-----DEV1-
DC700, EN size 3-6, white, similar to RAL 9016	DC700-----D9016
DC700, EN size 3-6, brown, similar to RAL 8014	DC700-----D8014
DC700, EN size 3-6, black, similar to RAL 9005	DC700-----D9005
DC700, EN size 3-6, stainless steel design	DC700-----D35--
DC700, EN size 3-6, stainless steel, full cover	DC700-1---D35--
DC700, EN size 3-6, customized finish	DC700-----DXXXX
DC700DA, EN size 3-6, silver, EV1	DC710-----DEV1-
DC700DA, EN size 3-6, white, similar to RAL 9016	DC710-----D9016
DC700DA, EN size 3-6, brown, similar to RAL 8014	DC710-----D8014
DC700DA, EN size 3-6, black, similar to RAL 9005	DC710-----D9005
DC700DA, EN size 3-6, stainless steel design	DC710-----D35--
DC700DA, EN size 3-6, stainless steel, full cover	DC710-1---D35--
DC700DA, EN size 3-6, customized finish	DC710-----DXXXX
DC700AC, EN size 3-6, silver, EV1	DC711-----DEV1-
DC700AC, EN size 3-6, white, similar to RAL 9016	DC711-----D9016
DC700AC, EN size 3-6, brown, similar to RAL 8014	DC711-----D8014
DC700AC, EN size 3-6, black, similar to RAL 9005	DC711-----D9005
DC700AC, EN size 3-6, stainless steel design	DC711-----D35--
DC700AC, EN size 3-6, stainless steel, full cover	DC711-1---D35--
DC700AC, EN size 3-6, customized finish	DC711-----DXXXX

### Guide rails

Guide rail G195, silver, EV1	DCG195----DEV1-
Guide rail G195, white, similar to RAL 9016	DCG195----D9016
Guide rail G195, brown, similar to RAL 8014	DCG195----D8014
Guide rail G195, black, similar to RAL 9005	DCG195----D9005
Guide rail G195, stainless steel	DCG195----D35--
Guide rail G195, customized finish	DCG195----DXXXX
Guide rail G193, silver, EV1	DCG193-----EV1-
Guide rail G193, white, similar to RAL 9016	DCG193-----9016
Guide rail G193, brown, similar to RAL 8014	DCG193-----8014
Guide rail G193, black, similar to RAL 9005	DCG193-----9005

### Accessories

Mounting plate A120, galvanized	DCA120-----40
Mounting plate A130, silver, EV1	DCA130-----EV1-
Mounting plate A130, white, similar to RAL 9016	DCA130-----9016
Mounting plate A130, brown, similar to RAL 8014	DCA130-----8014
Mounting plate A130, black, similar to RAL 9005	DCA130-----9005
Mounting plate A130, customized finish	DCA130-----XXXX
Mounting plate A136, silver, EV1	DCA136-----EV1-
Angle bracket A104, silver, EV1	DCA104-----EV1-
Angle bracket A104, white, RAL 9016	DCA104-----9016
Angle bracket A104, brown, similar to RAL 8014	DCA104-----8014
Angle bracket A104, black, similar to RAL 9005	DCA104-----9005
Replacement plate A124, galvanized	DCA124-----40
Glass door shoe A166, silver, EV1	DCA166-----EV1-
Screening plate A190, stainless steel	DCA190-----35--
Universal drilling gauge A176	DCA176-----
Mechanical hold-open device A152	DCA152-----
Mechanical opening damper A153	DCA153-----

DC700, silver



DC700, white



DC700, brown



DC700, black



DC700, SS design



DC700, SS full cover



G195, silver



G193, silver



A130



A136



A104



A120



A124



A166




A190



A176



A152



A153



The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, door and window hardware, locks, access control and service.

**ASSA ABLOY**  
Opening Solutions

ASSA ABLOY Opening Solutions EMEA  
Dukes Court  
Dukes Street  
Woking  
GU21 5BH  
United Kingdom  
[assaabloy.com](https://www.assaabloy.com)