

## ABLOY® EP402 Microswitch lock




### Product description

Key-operated switch locks provide key-actuated switching for burglar alarms, control boxes and other high security applications.

### Overview of Advantages

- The key can only be removed in the off position of the switch.
- The instantaneous coupling is achieved by means of a return spring and the key cannot be left in the on position.
- The locks can be mounted on objects with a thickness of 0.5 to 22 mm.

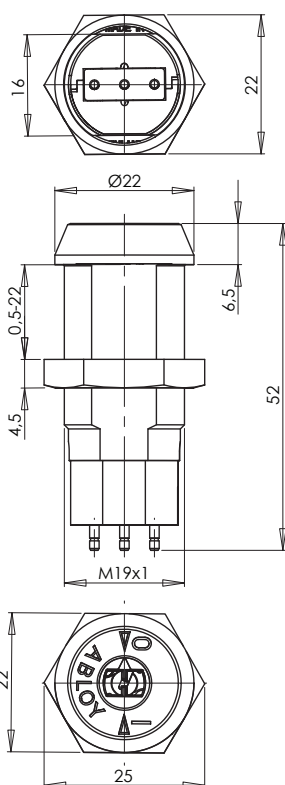

### Technical data

Available key systems	ABLOY SENTRY, ABLOY PROTEC, ABLOY PROTEC <sup>2</sup> , ABLOY SENTO, ABLOY CLASSIC
Body material	Brass
Available plating options	Bright chrome (Cr)
Handing	Right
Key removal	Locked position
Weight	0,07 kg
Maximum door thicknesses:	22 mm

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND, EXPRESS, IMPLIED, OR STATUTORY."