


Sensor-switched outdoor light

L 265 LED

Silver

EAN 4007841 007898



LED

long life LED
25.000 h CRI 80

8,5w

8,5 W 674 lm



3000K
warm-white



infrared sensor
360°



max. 8 m



IP44



2 - 2000 lux



5 sec - 15 min



manual override



ideal 1,8 - 2 m

Function description

Slim design, captivating light. STEINEL outdoor light L 265 LED, ideal for gardens, drives or pathways. 8,5 WSTEINEL LED lamp, 674 lm, 360° infrared sensor with a reach of 8 m, 4 function programmes geared to practical needs, high-quality aluminium with opal glass shade.

Technical specifications

Dimensions (L x W x H)	295 x 72 x 105 mm
Mains power supply	230 – 240 V / 50 Hz
Mounting height max.	2,50 m
Sensor Technology	passive infrared
Output	8,5 W
Interconnection	No
Luminous flux	674 lm
Colour temperature	3000 K
Colour variation LED	SDCM6
Colour Rendering Index CRI	80-89
With lamp	Yes, LED lamp
Lamp	LED can be replaced
LED life expectancy (max. °C)	25000 h
Base	E27
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No

Mechanical scalability	No
Reach, radial	r = 2 m (13 m ²)
Reach, tangential	r = 7 m (154 m ²)
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function, detail	LED effect light
Soft light start	Yes
Continuous light	selectable, 4h
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-10 – 50 °C
Housing material	Aluminium
Cover material	Glass opal
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Version	Silver
PU1, EAN	4007841007898

Sensor-switched outdoor light

L 265 LED

Silver

EAN 4007841 007898




Accessories

EAN 4007841 008307 LED linear lamp for L 265 LED

EAN 4007841 009038 replacement mini-sensor

Detection Zone

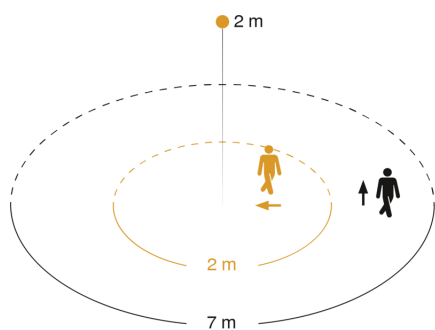

Mögliche Montagehöhe: 1,80 m – 2,50 m

Orange: radial

Schwarz: tangential